



## CASE SEALER

# Legend Random

## HIGH PERFORMANCE - CASE SEALING



The Little David® **Legend Random** is an operator fed, semi-automatic, random, industrial grade case sealer designed to top and bottom seal corrugated cases.



### PERFORMANCE & DESIGN FEATURES

#### PERFORMANCE

- Operator friendly self tensioning belt systems require no manual adjustments; reduces wear.
- Light touch head paddle senses case height
- Light touch roller switch in pack table centers case
- Powerful 1/3 HP High Efficiency Motor Drive System
- 3-2-1 Warranty, see back for details

#### VERSATILE

- Compact footprint
- Large case range
- Automatic height and width adjustment
- Converts from 2 to 3" tape in the field
- Head raise switch for easy cartridge access

#### DURABILITY

- 24/7 operation
- Strong interlocking steel base
- 7 Gauge steel mast
- 12 Gauge welded steel head and structural platform
- Stainless steel side rails

#### SAFETY

- Single Mast Design allows operator clear path in front of machine
- Tape cartridge features patented locking knife guard

# LITTLE DAVID

## Legend Random

Legend Random utilizes CaseLocker™60 series tape cartridges:

- Top and bottom cartridges are interchangeable
- Patented locking knife guard - Knife guard system allows the blade to be exposed only when the rollers are depressed
- Telescoping tape core allows for varying tape core sizes
- Patented tool-less removal of blades and wipe rollers
- Processes weak corrugated
- No lubrication points
- Utilize link bar and knife arm bearings for added strength

Legend Random offers tilt back feature for replacing top tape.



Legend Random is often paired with CF-5AF to form a mini pack station for random size cases.

### Options of the Legend Random:

- Pack table ( roller bed-exit)
- Casters
- NEMA 12 electrical package
- NEMA 4 wiring-enclosure & switch
- Increased conveyor height
- 34" high case capability (type II)
- Mirror Image
- 3 phase electrics
- S parts kit Includes
- NESTAFLEX Conveyor
- 3" wide PST ( top & bottom)
- Spare cartridge
- Secondary stop button

### SPECIFICATIONS:

#### Power Requirements:

115 VAC, single phase, 60 cycle

Note: Other voltages available

Contact Loveshaw for details

#### Operating Speed:

Continuous belt drive; 80' per minute (24.4/min.)

(production rate depends on box size and operator dexterity)

#### Closure Material:

Pressure Sensitive Tape

#### Weight:

275 lbs. (125 kg.), uncrated

#### Conveyor Height:

22 1/4" - 32 1/4" standard

### CASE CAPACITY:

(with 2' wide CaseLockerST Cartridge)

Length: 6 1/2" - Inf"

Width: 4 1/2" - 20"


Height: 4 1/2" - 24"

### MACHINE DIMENSIONS:

55 3/4" (142cm) Length

31 15/16" (81cm) Width

57 3/16" (145.26cm) Height

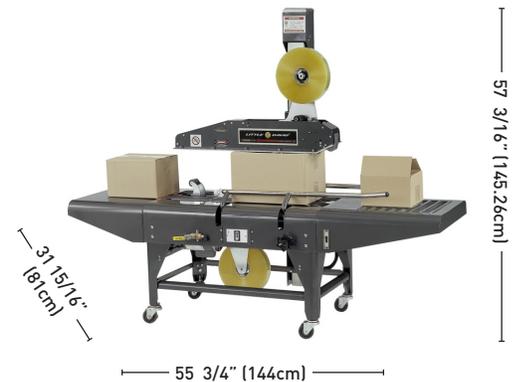

### Legend Random Warranty:

- 1 Year on all components\*
  - 2 Years Gear Reducer and Motor
  - 3 Years on Cartridge\*
- \*Moving and wear parts are not included.  
Other restrictions may apply

DISTRIBUTED BY:

## LOVESHAW

2206 East Turnpike  
P.O. Box 83, South Canaan, PA 18459  
Tel: (570) 937-4921 Fax: (570) 937-3229  
Toll Free: (800) 572-3434

## LOVESHAW Europe

Unit 1 Newton Park  
West Portway Industrial Estate  
Andover, Hampshire, England SP10 3SH  
Tel: (1264) 357511 Fax: (1264) 355964

Printed in America

© 2019 LOVESHAW

<https://www.linkedin.com/company/loveshaw>  
<https://www.facebook.com/LoveshawPackagingSystems>  
<http://www.youtube.com/loveshaw>  
<http://twitter.com/loveshaw>

